


SMG 20S/25S

High performance machines for plastic strapping

For small and narrow products



Save money with thin PP strap!

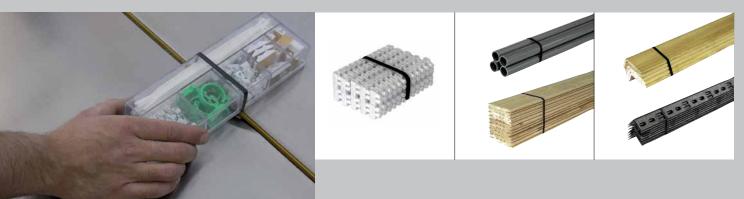



SMG 20S/25S

For small and narrow products

5 Highlights

- Up to 70 cycles per minute
- Touch Panel: Strap tension easily adjustable
- Simple technology, few moving parts
- Constant strap tension for various products
- Simple coil change

Cost effective

- High availability
- Use of 5 mm PP strap with SMG 10 – the alternative to 9/12 mm strap
- Use of thin PP straps
- Maintenance-friendly

Strapex advantage



Machine, strap and aftersales service as a total package

User friendly

- Plug & Play: Very easy handling
- Mobile, ready to use anywhere
- Adjustable working height
- All operating functions using foot pedal



Robust, compact design





Simple coil change



For use as a stand alone machine or integrated into conveyor systems




Easily accessible



Maintenance without tools

Technical data	SMG 20S	SMG 25S
Dispenser position	Side mounted	Side mounted
Performance per minute	70 cycles	70 cycles
Arch dimensions		
(width x height)		
500 x 400 mm	5 mm	9/12 mm
Working height	770–930 mm	770–930 mm
Electrical supply	230 V, 50 Hz	230 V, 50 Hz
	115 V, 60 Hz	115 V, 60 Hz
Strap tension, up to	300 N	450 N
Heat seal	30 s	30 s
Weight, approx.	170 kg	190 kg
Interface for integration		
into automatic conveying		
systems	•	•
Plastic strap (PP)		
5 x 0,40 mm	372.605.585	
9 x 0,45 mm Superflex		323.109.540
12 x 0,45 mm Superflex		323.112.534
Strap coil, inside/outside Ø	200/430 mm	200/430 mm
Packages		
Min. width x height	50 x 5 mm	50 x 5 mm
Max. weight	35 kg	35 kg

Options



Bundle stops for precise positioning of loose packages



Roller table for easy handling of heavy parcels



Second foot pedal for operation on both sides





Cycle start triggered by photocell

